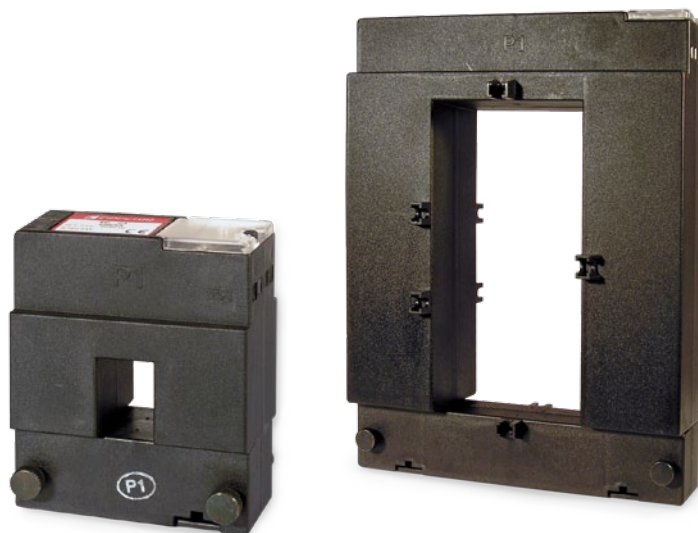


## Current transformers

**TP**

## Split-core current transformer

**Description**

- The most important features of these transformers are that they are "disassemblable". In other words, the whole installation does not have to be disassembled.
- Types: from 100 to 5000 A
- Busbar dimensions: from 20 x 30 mm to 80 x 160 mm
- Transformer certificate sheet is attached

**Application**

Converting a high nominal current to a lower current so that it can be measured by the unit.

They have a split core and can be installed with no need to interrupt the installation's power supply.

**Features**

<b>Frequency</b>	50 / 60 Hz
Isolation voltage	3 kV ac
Thermal short-circuit current, $I_{th}$	60 $I_n$
Dynamic current, $I_{dyn}$	2.5 $I_n$
Highest current in the material	0.72 kV ac
Thermal class	A (105 °C)
Transformer ratio	Depending on the type (.../5 or .../1 A)
Type of encapsulation	Self-extinguishing VO plastic (UL 94VO)
Secondary sealable terminals	Yes
<b>Standards</b>	
IEC 44-1, UNE 21 088-1, UL 94, VDE 0414	

Current transformers

**TP series**

Split-core current transformer



References

Type	TP -23				TP -58				TP -88			
Busbar (mm)	20 x 30 mm				50 x 80 mm				80 x 80 mm			
Dimensions (mm)												
	a	110			145			145				
	b	89			114			144				
	c	58			50			50				
A \ V-A	Class			Code	Class			Code	Class			Code
	0,5	1	3		0,5	1	3		0,5	1	3	
100/5	-	-	1,5	[*] M70111								
150/5	-	-	2	[*] M70112								
200/5	-	1,5	2,5	[*] M70113								
250/5	-	2	4	[*] M70114	1	2	4	[*] M70121	1	2	4	[*] M70131
300/5	1,5	4	6	[*] M70115	1,5	3	6	[*] M70122	1,5	3	6	[*] M70132
400/5	2,5	6	10	[*] M70116	1,5	3	10	[*] M70123	1,5	3	10	[*] M70133
500/5					2,5	5	15	[*] M70124	2,5	5	15	[*] M70134
600/5					2,5	5	17,5	[*] M70125	2,5	5	17,5	[*] M70135
750/5					3	6	18	[*] M70126	3	6	18	[*] M70136
800/5					3	7	18	[*] M70127	3	7	18	[*] M70137
1 000/5					5	10	20	[*] M70128	5	10	20	[*] M70138

Type	TP -812				TP -816			
Busbar (mm)	80 x 120 mm				80 x 160 mm			
Dimensions (mm)								
	a	185			245			
	b	144			184			
	c	50			70			
A \ V-A	Class			Code	Class			Code
	0,5	1	3		0,5	1	3	
500/5	-	4	12	[*] M70141				
600/5	-	5	14	[*] M70142				
750/5	2,5	6	17	[*] M70143				
800/5	3	7	18	[*] M70144				
1 000/5	5	9	20	[*] M70145	10	15	20	[*] M70151
1 200/5	6	11	24	[*] M70146				
1 250/5	7	15	28	[*] M70147				
1 500/5	8	17	30	[*] M70148	15	20	25	[*] M70152
2 000/5					15	20	25	[*] M70153
2 500/5					15	20	25	[*] M70154
3 000/5					20	25	30	[*] M70155
4 000/5					20	25	30	[*] M70156
5 000/5					20	25	30	[*] M70157


Current transformers

**TP series**

Split-core current transformer



Dimensions

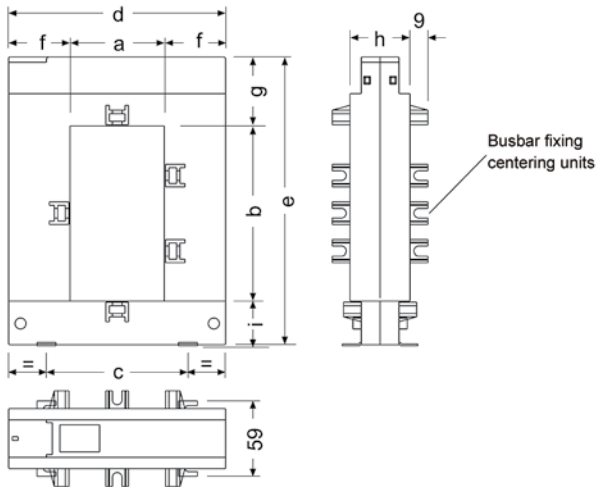

dimensions (mm)	TP-23	TP-58	TP-88	TP-812	TP-816
a	20	50	80	80	80
b	30	80	80	120	160
c	51	78	108	108	120
d	89	114	144	144	184
e	110	145	145	185	245
f	34	32	32	32	52
g	47	32	32	32	47
h	40	32	32	32	52
i	32	32	32	32	38

Note: All types have fixing centering units, except for TP-23